

RMSN


Rotary Magnetic Scale Nonius

Indicating movements with RMSN is simple, precise and economic. RMSN rotary magnetic are used in continuous or discrete positioning, motion control, such as commutation, and many other solutions. BOGEN manufactures rotary scales on the flange, outer or inner diameter. Production processes cover both prototype quantities and large series production. The combination of BOGEN encoders and scales with optimized pole pitches ensure highest system accuracy.

Counting

Controlling

ALWAYS
ABSOLUTE

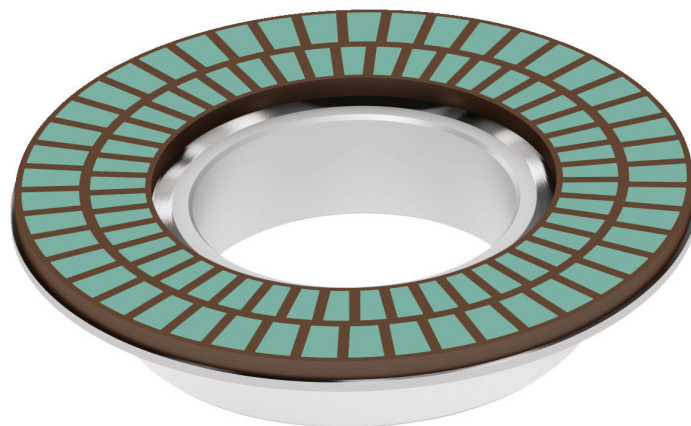

Features and Benefits

- wide range of selectable magnetic scale characteristics: low to very high accuracy, several pole pitches, different scale geometries, a variety of magnetic materials
- two track magnetization
- customizable for many applications
- no wear from usage
- resistant to dust, cooling lubricant emulsion, oil, etc.

Features

Magnetic Properties (Elastomer-bonded ferrite/Isotropic)

residual induction [Br] mT	240-260
coercive force [Hcb] kA/m	171-195
intrinsic coercive force [Hcj] kA/m	223-279
maximum energy product [Bhmax] MGOe	1.45-1.65
reversing temperature modulus % / °C	-0.18
physical properties	
tensile strength N/mm ² (MPa)	>2.5
hardness shore D	30 -45
density g/cm ³	3.55-3.7
temperature range °C	-40 to 100

Chemical Properties

hydraulic oil (23 °C × 72 h)	++
alcohol (23 °C × 72 h)	+
weak alkali (23 °C × 72 h)	++
detergent (23 °C × 72 h)	++
aromatic solvent (23 °C × 72 h)	-
organic, anorganic acid (23 °C × 72 h)	-
aliphatic solvent (23 °C × 72 h)	-
water (60 °C × 72 h)	++

Magnetic Properties (Hard ferrite/Isotropic)

residual induction [Br] mT	200 - 220
coercive force [Hcb] kA/m	135 - 140
intrinsic coercive force [Hcj] kA/m	220 - 230
maximum energy product [Bhmax] MGOe	1.45 - 1.65
reversing temperature modulus % / °C	-0.19

Physical Properties


tensile strength N/mm ² (MPa)	50
hardness HV	500 -600
density g/cm ³	4.8 - 4.9
temperature range °C	- 40 to 250

Chemical Properties

hydraulic oil (23 °C × 72 h)	++
alcohol (23 °C × 72 h)	+
weak alkali (23 °C × 72 h)	++
detergent (23 °C × 72 h)	++
aromatic solvent (23 °C × 72 h)	chemical resistance depends on temperature, concentration and time of exposure to the medium
organic, anorganic acid (23 °C × 72 h)	
aliphatic solvent (23 °C × 72 h)	
water (60 °C × 72h)	++

- not suitable + good ++ very good

Due to mechanical characteristics of individual parts and the applied manufacturing processes, the top surface of the magnetic component may show minimal surface changes. This has no negative impact on functionality.

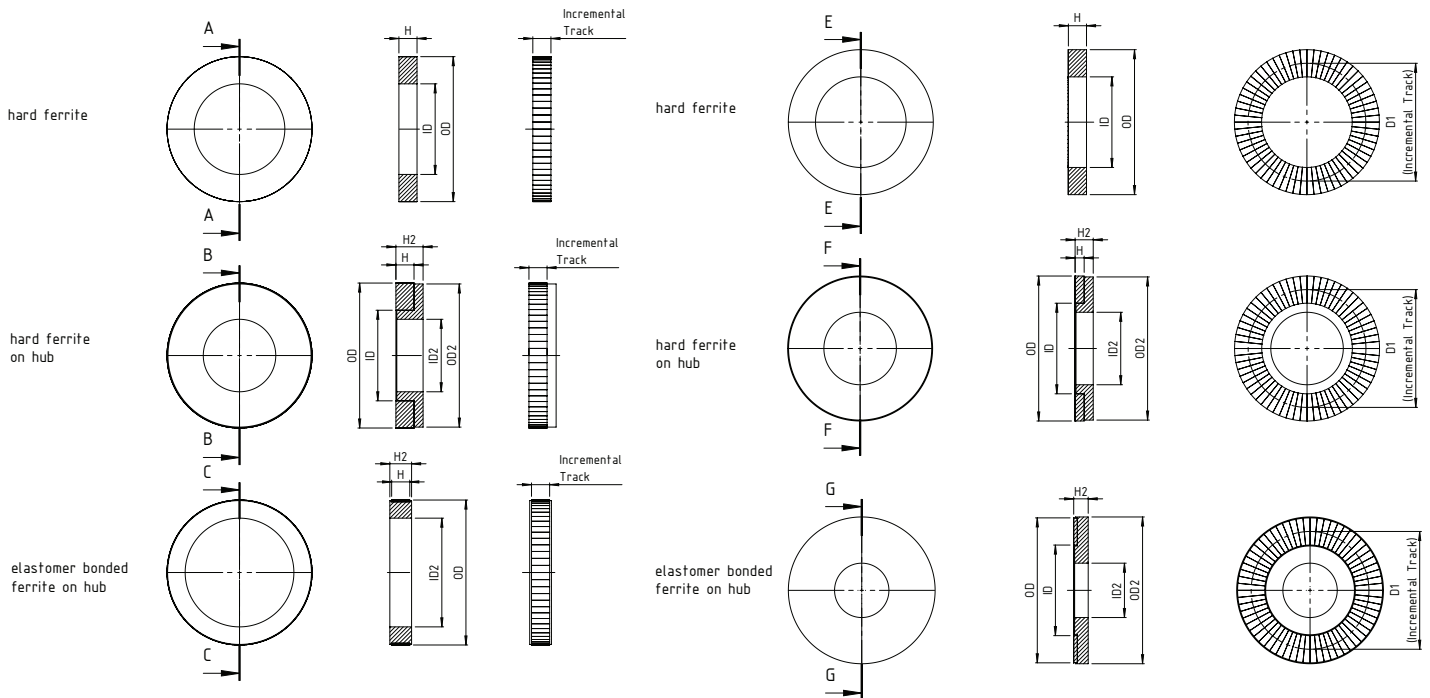

Available Dimensions RMSN Axial

order no.	order code	OD (elastomer/ hard ferrite)	OD2 (hub)	ID (elastomer/ hard ferrite)	ID2 (hub)	fit	H (elastomer/ hard ferrite)	H2 (RMSN)	master track Ø	nonius track Ø
		[mm]					[mm]			
51558	RMSN16-15A-1.28-E-S	15.50	17.00	3.00	5.00	D9	1.00	7.00	13.04	5.84
51701	RMSN16-15A-1.28-E-S	15.50	16.00	3.00	3.00	H7	1.00	6.00	13.04	5.84
51216	RMSN32-31A-1.28-E-S	29.00	29.80	15.10	10.00	H7	1.00	6.00	26.08	18.88
51499	RMSN32-31A-1.28-E-S	29.00	29.00	15.10	11.00	H7	1.00	3.50	26.08	18.88
51217	RMSN32-31A-1.28-F-A	30.00	29.80	11.50	10.00	H7	2.50	6.00	26.08	18.88
51694	RMSN32-31A-1.50-F-A	34.00	33.60	20.40	15.70	H7	2.00	6.00	30.56	23.36
51352	RMSN32-31A-1.50-E-S	33.50	34.00	20.00	19.00	H7	1.00	6.00	30.35	23.15
51353	RMSN32-31A-1.50-E-S	33.50	34.00	20.00	16.00	H7	1.00	6.00	30.56	23.36
52066	RMSN64-63A-1.28-F-A	55.00	54.00	42.00	35.00	H7	2.50	4.00	52.15	44.95
52087	RMSN64-63A-1.28-E-S	55.00	55.00	42.00	35.00	H7	1.00	2.50	51.78	45.28
52076	RMSN64-63A-1.50-F-A	64.50	64.00	51.00	40.00	H7	3.00	4.50	61.12	53.92
52097	RMSN64-63A-1.50-E-S	64.00	64.00	51.00	45.00	H7	1.00	2.50	61.12	53.92

Available Dimensions RMSN Radial

order no.	order code	OD (elastomer/ hard ferrite)	OD2 (hub)	ID (elastomer/ hard ferrite)	ID2 (hub)	fit	H (elastomer/ hard ferrite)	H2 (RMSN)
		[mm]					[mm]	
51218	RMSN32-31-1.28-F-A	24.50	24.00	17.00	10.00	H7	6.00	7.00
51467	RMSN32-31-1.28-F-A	24.50	24.00	17.00	16.35	H7	6.00	10.00
51269	RMSN64-63-1.28-F-A	50.55	50.00	38.00	31.00	H7	8.00	9.50
51356	RMSN64-63-1.28-E-S	50.55	49.55	48.55	25.00	H7	10.00	11.00
51521	RMSN64-63-1.50-F-A	59.50	50.00	43.50	35.00	H7	6.00	7.50
51529	RMSN64-63-1.50-E-S	59.60	57.60	57.60	52.60	H7	6.00	6.00

magnet material: E = elastomer; F = hard ferrite; hub material: S = steel; A = aluminum

Order Code Sensor

RMSN M-N - S - P - M - H - G- P

			code	explanation *
parameters	M-N	number of pole pairs	... - ...	number of pole pairs: Master-Nonius, e. g. 32-31
	S	surface of magnetization		radial, on the circumference (no input required)
			A	axial, on the end surface
	P	pole pitch (mm)	...	pole pitch of nonius track in millimeter, e. g. 1.28
	M	magnetization material	F	hard ferrite [8/22]
			E	elastomer bonded ferrite
			V	vulcanized ferrite
			P	plastroferrite
	H	hub material	A	aluminum
			S	steel
			M	sheet metal
	G	accuracy class		300 arc seconds (no input required)
			G...	only necessary if deviates from default
	P	protection		without protection (no input required)
S			stainless steel	
F			fibre	
P			plastic	

* standard parameters are bold

Ordering Example

RMSN32-31-1.28-E-A-G100 Rotary Magnetic Scale Nonius, 32 master-31 nonius pole pairs radial on the circumference, pole pitch of nonius track 1.28 mm, elastomer bonded ferrite (magnetization material), aluminum hub, 100 arc seconds accuracy class, no protection

RMSN64-63A-1.50-E-S Rotary Magnetic Scale Nonius, 64 master-63 nonius pole pairs , surface of magnetization axial, pole pitch of nonius track 1.50 mm, elastomer bonded ferrite (magnetization material), stainless steel hub, 300 arc seconds accuracy class, no protection

Customized Rotary Magnetic Scales

Customized rotary magnetic scales with different dimensions and pole numbers can be produced economically, and BOGEN scale production capabilities are designed for high flexibility at low cost. Please contact BOGEN to discuss your requirements.

BOGEN Magnetics GmbH reserves the right to make changes, without notice, in the products, including software, described or contained herein in order to improve design and/or performance. Information in this document is believed to be accurate and reliable. However, BOGEN Magnetics GmbH does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. BOGEN Magnetics GmbH takes no responsibility for the content in this document if provided by an information source outside of BOGEN products. In no event shall BOGEN Magnetics GmbH be liable for any indirect, incidental, punitive, special or consequential damages (including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) irrespective the legal base the claims are based on, including but not limited to tort (including negligence), warranty, breach of contract, equity or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, BOGEN product aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the General Terms and Conditions of Sale of BOGEN Magnetics GmbH. Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Unless otherwise agreed upon in an individual agreement BOGEN products sold are subject to the General Terms and Conditions of Sales as published at www.bogen-magnetics.com.